





# Ferrite Beads

Type: A1CRHW

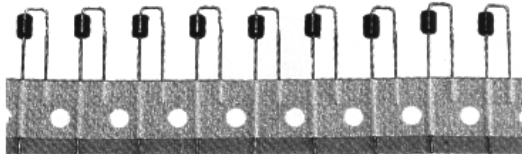

## Features

Ferrite bead inductors are used for noise suppression purpose. Available in Taping version for automatic insertion. Both types provide high reliability and superior characteristics when used to prevent noise over the wide range of frequencies in the VHF and UHF bands.

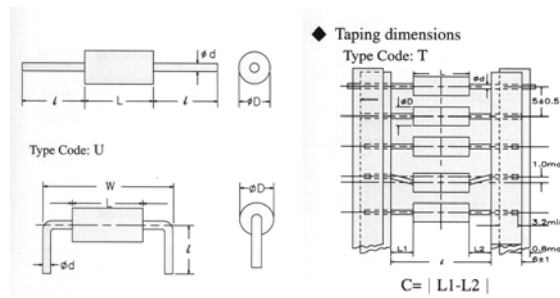

PART NUMBER	L +0.3	D +0.2	l +2	d +0.05	W/Cmac
A1CRHW 354708N	4.7	3.5	28	0.65	
A1CRHW 356008N	6.0	3.5	28	0.65	
A1CRHW 359008N	9.0	3.5	28	0.65	
A1CRHW 354708U	4.7	3.5	7	0.65	W : 10.0
A1CRHW 356008U	6.0	3.5	7	0.65	W : 12.5
A1CRHW 359008U	9.0	3.5	7	0.65	W : 15.0
A1CRHW 354708T	4.7	3.5	52	0.65	C max : 1.5
A1CRHW 356008T	6.0	3.5	52	0.65	C max : 1.5
A1CRHW 359008T	9.0	3.5	52	0.65	C max : 1.5