

Weight 115 gr

### Italtras 2VA H = 18,5mm

Myrra Code	Era Code	Pins Code	1-3 Pri (V)	7-5 Pri (V)	16-14 Sec(V)	10-12 Sec(V)
030-6866.0L	42209500	115	115	6	6	
030-6869.0L	42209600	115	115	9	9	
030-6872.0L	42209700	115	115	12	12	
030-6875.0L	42209800	115	115	15	15	
030-6878.0L	42209900	115	115	18	18	

Weight 140 gr

### Italtras 4VA H = 20,5mm

Myrra Code	Era Code	Pins Code	1-3 Pri (V)	7-5 Pri (V)	16-14 Sec(V)	10-12 Sec(V)
45019	030-6935.0L	42210500	115	115	6	6
45020	030-6938.0L	42210600	115	115	9	9
45021	030-6941.0L	42210700	115	115	12	12
45022	030-6944.0L	42210800	115	115	15	15
45023	030-6947.0L	42210900	115	115	18	18

Weight 175 gr

### Italtras 6VA H = 23mm

Myrra Code	Era Code	Pins Code	1-3 Pri (V)	7-5 Pri (V)	16-14 Sec(V)	10-12 Sec(V)
45025	030-7004.0L	42211500	115	115	6	6
45026	030-7007.0L	42211600	115	115	9	9
45027	030-7010.0L	42211700	115	115	12	12
45028	030-7013.0L	42211800	115	115	15	15
45029	030-7016.0L	42211900	115	115	18	18

Weight 250 gr

### Italtras 10VA H = 21,5mm

Myrra Code	Era Code	Pins Code	1-4 Pri (V)	9-6 Pri (V)	17-19 Sec(V)	14-12 Sec(V)
039-5026.0L	42213000	115	115	6	6	
039-5029.0L	42213010	115	115	9	9	
039-5032.0L	42213020	115	115	12	12	
039-5035.0L	42213030	115	115	15	15	
039-5038.0L	42213040	115	115	18	18	

Weight 320 gr

### Italtras 14VA H = 25mm

Myrra Code	Era Code	Pins Code	1-4 Pri (V)	9-6 Pri (V)	17-19 Sec(V)	14-12 Sec(V)
45043	039-5095.0L	42213500	115	115	6	6
45044	039-5098.0L	42213600	115	115	9	9
45045	039-5101.0L	42213700	115	115	12	12
45046	039-5104.0L	42213800	115	115	15	15
45047	039-5107.0L	42213900	115	115	18	18

Weight 380 gr


### Italtras 18VA H = 28mm

Myrra Code	Era Code	Pins Code	1-4 Pri (V)	9-6 Pri (V)	17-19 Sec(V)	14-12 Sec(V)
45049	039-5164.0L	42214500	115	115	6	6
45050	039-5167.0L	42214600	115	115	9	9
45051	039-5170.0L	42214700	115	115	12	12
45052	039-5173.0L	42214800	115	115	15	15
45053	039-5176.0L	42214900	115	115	18	18

## Trasformatori Basso Profilo Ta 40°C/B Low Profile Transformers Ta 40°C/B

- Conformità alle norme CEI EN 615 58; CEI EN 61558
- Tensione di isolam. 3750 VAC; Insul. voltage 3750 VAC
- Grado di protezione IP00; Degree of protection IP00
- Test elettrici sul 100% della produzione; 100% tested

### Type UI 30

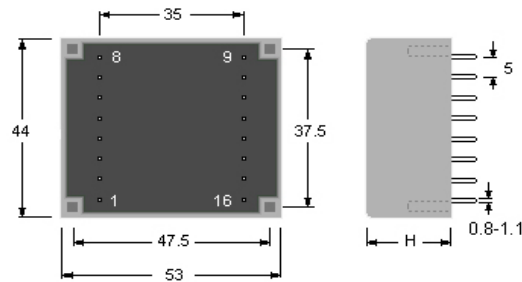


Weight 240 gr

### Italtras 10VA H = 29,5mm

Myrra Code	Era Code	Pins Code	1-3 Pri (V)	7-5 Pri (V)	16-14 Sec(V)	10-12 Sec(V)
45031	030-7073.0L	42212500	115	115	6	6
45032	030-7076.0L	42212600	115	115	9	9
45033	030-7079.0L	42212700	115	115	12	12
45034	030-7082.0L	42212800	115	115	15	15
45035	030-7085.0L	42212900	115	115	18	18

### Type UI 39

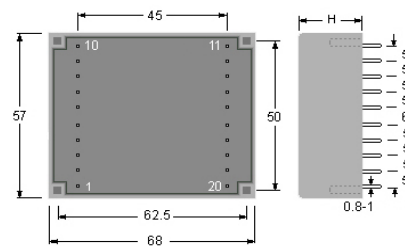

Weight 450 gr

### Italtras 24VA H = 32mm

Myrra Code	Era Code	Pins Code	1-4 Pri (V)	9-6 Pri (V)	17-19 Sec(V)	14-12 Sec(V)
45055	039-5233.0L	42215500	115	115	6	6
45056	039-5236.0L	42215600	115	115	9	9
45057	039-5239.0L	42215700	115	115	12	12
45058	039-5242.0L	42215800	115	115	15	15
45059	039-5245.0L	42215900	115	115	18	18

Weight 540 gr

### Italtras 30VA H = 36mm

Myrra Code	Era Code	Pins Code	1-4 Pri (V)	9-6 Pri (V)	17-19 Sec(V)	14-12 Sec(V)
45061	039-5302.0L	42216500	115	115	6	6
45062	039-5305.0L	42216600	115	115	9	9
45063	039-5308.0L	42216700	115	115	12	12
45064	039-5311.0L	42216800	115	115	15	15
45065	039-5314.0L	42216900	115	115	18	18