




Italtras transformers in the world

low profile - encapsulated - toroidal - open - pcb or rack - inductor


Wound Choke

Type: AR6H

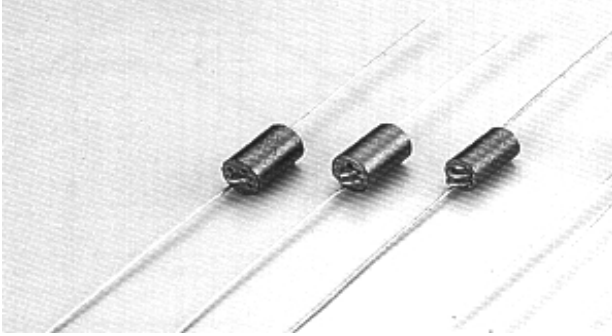

Features

The AR6H type wide-band chokes are mainly used in the high current carrying PC boards to filter the EMI from the outsides. Taping & Reel version are available for automatic insertion.

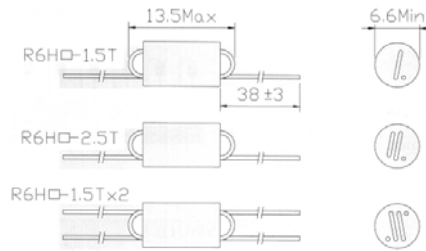

PART NUMBER	Core Material	Winding Turns	Impedance (Ohm) Min	Test Frequency (MHz)
AR6HJ 1.5T	J	1.5	300	120
AR6HJ 2.5T	J	2.5	600	50
AR6HJ 1.5TX2	J	1.5X2	700	50
AR6HD 1.5T	D	1.5	350	250
AR6HD 2.5T	D	2.5	700	180
AR6HD 1.5X2	D	1.5X2	800	110

CHARACTERISTICS

